


Product Group: **Hooks**
Sub Group: **2636 Series**
Item: **Insert Header Tab**

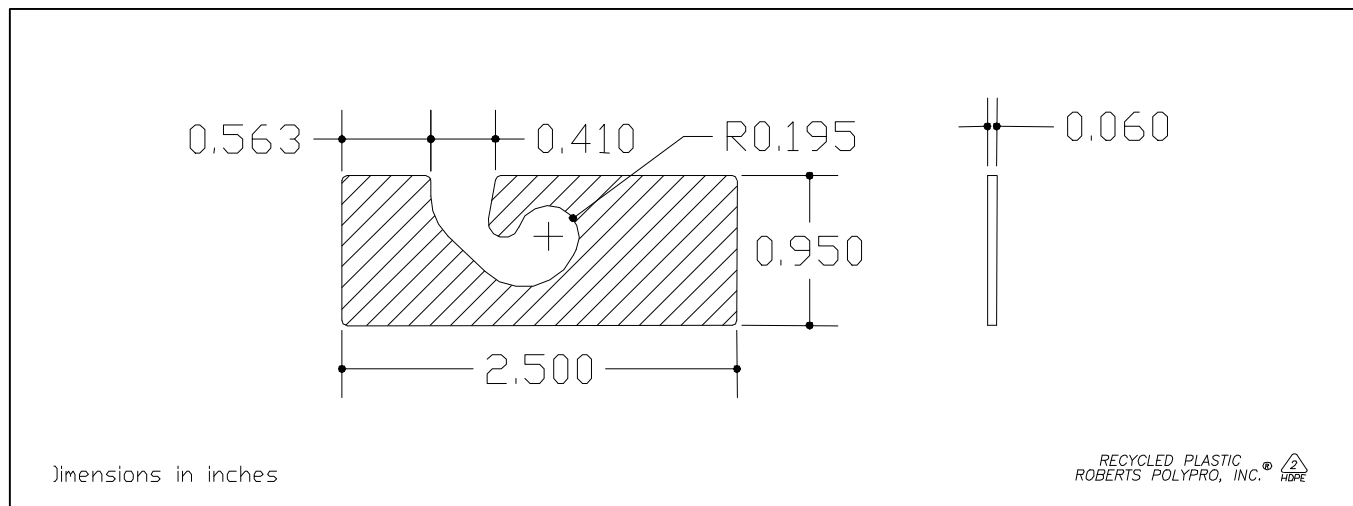

Current Product Numbers

2636C.WHT Welded, White Insert Header Tab ¹
Custom Ask us about customizing
a hook to meet your specifications

Quality Specifications

Material: High Density Polyethylene
Thickness: 0.059" \pm 0.001"
Flatness Gauge: 1 Part Thickness
Surface Finish: Gloss
Part Weight: 1.88 grams
Cartridge Count: 100 ²
Cartridge Weight: 188 grams ²
Weld Strength: 4 lbs. \pm 1 lb. ²
Weld Test Frequency: 1 Stick per Cavity - Every Six Cases ²

Packaging Information

Case Quantity:	<i>Loose:</i> N/A	<i>Welded:</i> 9,600
Case Dimensions:	<i>Loose:</i> N/A	<i>Welded:</i> 15" \times 12-1/4" \times 9-1/4"
Pads per Case:	<i>Loose:</i> N/A	<i>Welded:</i> 9
Pad Dimensions:	<i>Loose:</i> N/A	<i>Welded:</i> 14-7/8" \times 12-1/8"
Case Weight:	<i>Loose:</i> N/A	<i>Welded:</i> 43.5 lbs.
Pallet Weight:	<i>Loose:</i> N/A	<i>Welded:</i> 1,345 lbs.
Cases per Pallet:	<i>Loose:</i> N/A	<i>Welded:</i> 30

Packaging Notes: *Loose* - N/A *Welded* - A 15P pad is placed on the bottom of a 15C case, followed by 8 layers of 12 welded sticks of 100 parts. Each layer is separated by a 15P pad, another 15P pad is placed on top and the box is tape sealed.

¹ The procedure used in welding these products is an exclusive, patented Roberts PolyPro process.
² Applies only to welded hooks.