


Product Specification Sheet

5416 Wyoming Avenue Charlotte, NC 28273 Tel: 704.588.1794

Fax: 704.588.1821

Product Group: Hooks

Sub Group: 7240 Series Item: Captive Hook

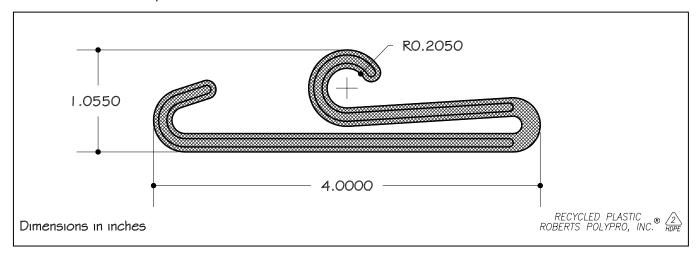

Current Product Numbers

7240D.BLK Organized, Black Captive Hook ¹
7240D.WHT Organized, White Captive Hook ¹
7240L.BLK Loose, Black Captive Hook
7240L.WHT Loose, White Captive Hook
Custom Ask us about customizing

a hook to meet your specifications

Quality Specifications

Material: General Purpose Polypropylene

Thickness: 0.150" Flatness Gauge: N/A Surface Finish: Gloss Part Weight: 2.49 grams **Cartridge Count:** N/A^2 **Cartridge Weight:** N/A^2 Weld Strength: N/A^2 Weld Test Frequency: N/A^2

Packaging Information

Case Quantity: Organized: 4,536 Loose: 3,000 Mach.: N/A **Case Dimensions:** *Organized:* 19-1/2" × 12-1/8" × 11-5/8" *Loose*: 19-1/2" × 12-1/8" × 11-5/8" Mach.: N/A Pads per Case: Organized: 8 Loose: 2 Mach.: N/A Pad Dimensions: *Organized:* 19-3/16" × 11-15/16" Loose: 19-3/16" × 11-15/16" Mach.: N/A **Case Weight:** Organized: 29.80 lbs. Loose: 18.22 lbs. Mach.: N/A **Pallet Weight:** Mach.: N/A Loose: 470 lbs. Organized: 750 lbs. Cases per Pallet: Organized: 24 Loose: 24 Mach.: N/A

Packaging Notes: Organized - A pad is placed on the bottom of the case, followed by 7 layers of organized hooks. All the layers contain

nine 11-3/4" \times 2-1/2" cards with 72 parts clipped onto each card. Each layer is separated by a pad, another pad is placed on top and the box is sealed. *Loose* - A pad is placed on the bottom of the case, followed by the parts. Then a

pad is placed on top and the box is sealed. Mach. - N/A

¹ The procedure used in organizing these products is an exclusive, patented Roberts PolyPro process.

² Applies only to mach hooks.