


Product Group: **Hooks**
Item: **335**
Description: **Universal Hook**

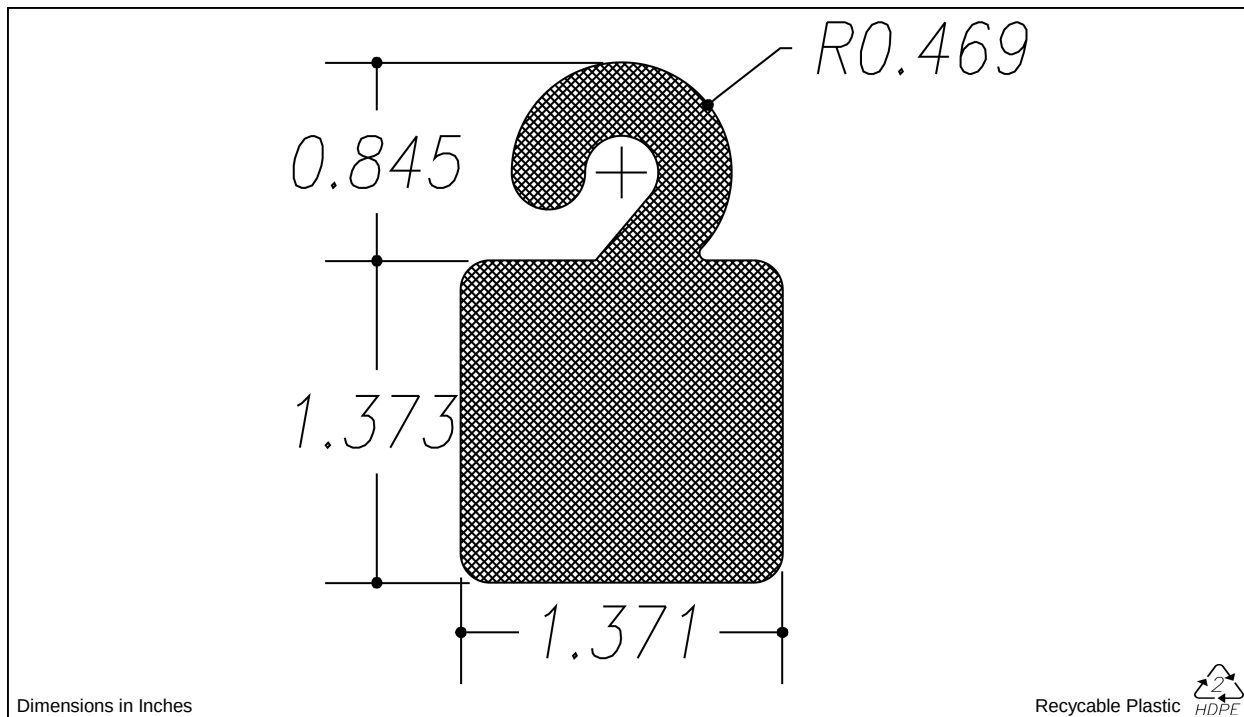

Quality Specifications

Material:	High Density Polyethylene	Cartridge Count:	233
Gauge:	0.049" $\pm$ 0.001"	Cartridge Weight:	410.08
Flatness Gauge:	1 Part Thickness	Weld Strength:	4lbs. $\pm$ 1lb.
Surface Finish:	Gloss	Weld Test Frequency :	Every 6 Cases, 1 Per Cavity
Part Weight :	1.76 grams		

*Ask us about customizing a product to meet your specifications.
Custom colors available from Pantone Matching System.*

Packaging Information		Loose: Case Id: 15C	Welded: Case Id: 19C
Case Quantity:		6,000	13,000
Case Dimensions:		15" x 12.25" x 9.25"	19.5" x 12.125" x 10.125"
Pads per Case:		2	5
Pad Dimensions:		14.875" x 12.125"	19.187" x 11.937"
Case Weight:		24.63 lbs	52.72 lbs
Pallet Weight:		Domestic - 1,025 lbs International - 1,419 lbs	Domestic - 1,885 lbs
Cases per Pallet:		Domestic - 40 International - 56	Domestic - 35
Parts per Pallet:		Domestic - 240,000 International - 336,000	Domestic - 455,000

Packaging Notes: *Loose - A 15P pad is placed on the bottom of a 15C case, followed by the parts. Then a 15P pad is placed on top and the box is tape sealed. Welded - A 19P pad is placed on the bottom of a 19C case, followed by 4 layers of 14 welded sticks containing 233 parts (minimum). Each layer is separated by a 19P pad, another 19P pad is placed on top and the box is tape sealed.*