


Product Specification Sheet

5416 Wyoming Avenue Charlotte, NC 28273 Tel: 704.588.1794

Fax: 704.588.1821

Product Group: Hooks

Sub Group: 7235 Series Item: Captive Hook

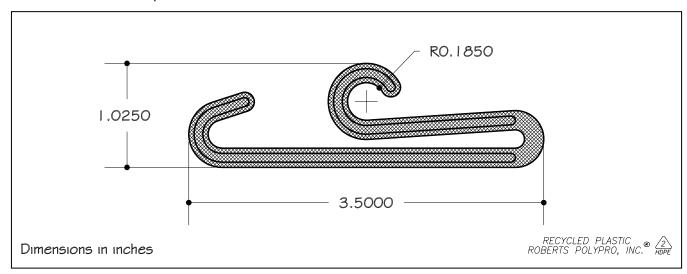

Current Product Numbers

7235D.BLK Organized, Black Captive Hook ¹
7235D.WHT Organized, White Captive Hook ¹
7235L.BLK Loose, Black Captive Hook
7235L.WHT Loose, White Captive Hook
Custom Ask us about customizing

a hook to meet your specifications

Quality Specifications

Material: General Purpose Polypropylene

Thickness: 0.150" Flatness Gauge: N/A Surface Finish: Gloss Part Weight: 2.30 grams **Cartridge Count:** N/A^2 **Cartridge Weight:** N/A^2 Weld Strength: N/A^2 Weld Test Frequency: N/A^2

Packaging Information

Case Quantity: Organized: 5,040 Loose: 3,000 Mach.: N/A **Case Dimensions:** *Organized:* 19-1/2" × 12-1/8" × 11-5/8" *Loose:* 19-1/2" × 12-1/8" × 11-5/8" Mach.: N/A Pads per Case: Organized: 8 Loose: 2 Mach.: N/A Pad Dimensions: *Organized:* 19-3/16" × 11-15/16" Loose: 19-3/16" × 11-15/16" Mach.: N/A Case Weight: Organized: 30.67 lbs. Loose: 16.86 lbs. Mach.: N/A **Pallet Weight:** Organized: 960 lbs. Loose: 546 lbs. Mach.: N/A Cases per Pallet: Organized: 30 Loose: 30 Mach.: N/A

Packaging Notes: Organized - A 19P pad is placed on the bottom of a 19C case, followed by 7 layers of organized hooks. All the layers

contain ten 11-3/4" \times 2-1/2" cards with 72 parts clipped onto each card. A 19P pad separates each layer, another 19P pad is placed on top and the box is tape sealed. *Loose* - A 19P pad is placed on the bottom of a 19C case, followed by

the parts. Then a 19P pad is placed on top and the box is tape sealed. Mach . - N/A

² Applies only to mach hooks.

¹ The procedure used in organizing these products is an exclusive, patented Roberts PolyPro process.