


Product Group: **Hooks**
Item: **105**
Description: **J - Hook**

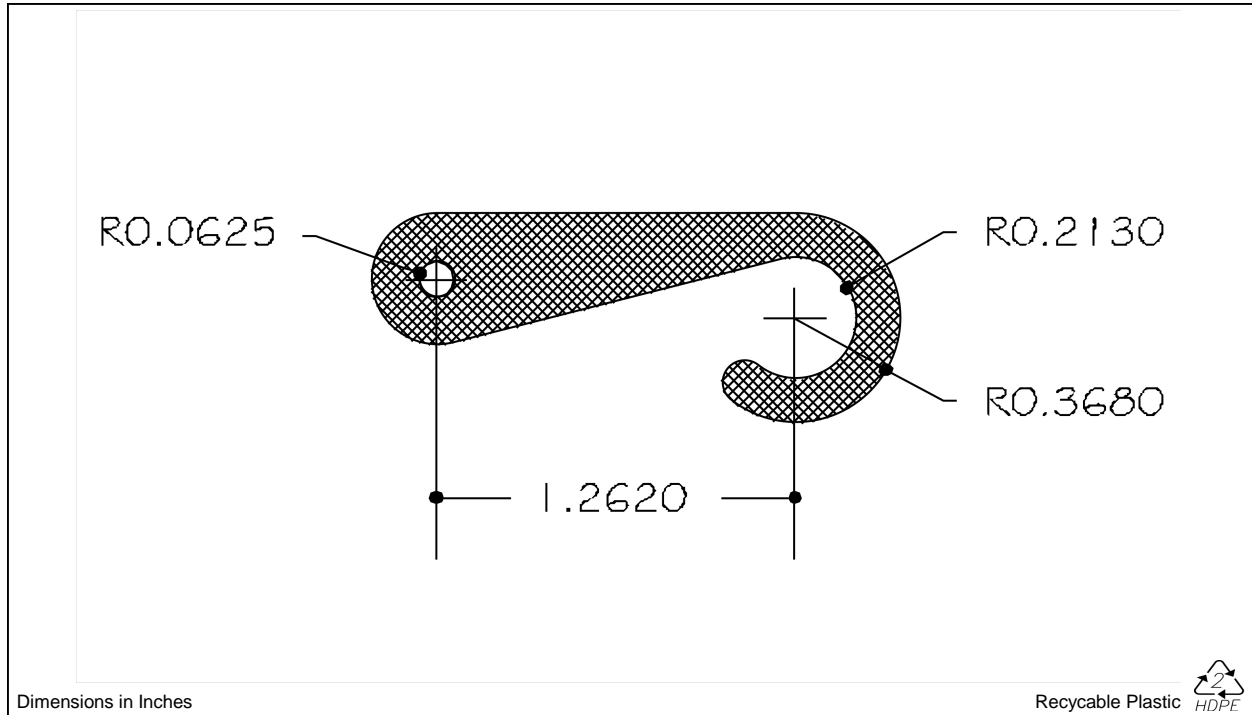

Quality Specifications

Material:	High Density Polyethylene	Cartridge Count:	235
Gauge:	0.049" ± 0.001"	Cartridge Weight:	115.15
Flatness Gauge:	1 Part Thickness	Weld Strength:	4lbs. ± 2lb.
Surface Finish:	Gloss	Weld Test Frequency :	Every Six Cases, Each Cavity
Part Weight :	0.49 grams		

*Ask us about customizing a product to meet your specifications.
Custom colors available from Pantone Matching System.*

Packaging Information		Loose:	Case Id: 15C	Welded:	Case Id: 15C
Case Quantity:		20,000		28,000	
Case Dimensions:		15" x 12.25" x 9.25"		15" x 12.25" x 9.25"	
Pads per Case:		2		11	
Pad Dimensions:		14.875" x 12.125"		14.875" x 12.125"	
Case Weight:		22.96 lbs		32.95 lbs	
Pallet Weight:		Domestic - 958 lbs	International - 1,326 lbs	Domestic - 1,358 lbs	
Cases per Pallet:		Domestic - 40	International - 56	Domestic - 40	
Parts per Pallet:		Domestic - 800,000	International - 1,120,000	Domestic - 1,120,000	

Packaging Notes: *Loose - A 15P pad is placed on the bottom of a 15C case, followed by the parts. Then a 15P pad is placed on top and the box is tape sealed. Pallets are stacked with 5 layers, each layer has 8 cases. Welded - A 15P pad is placed on the bottom of a 15C case, followed by 10 layers of 12 welded sticks containing 235 parts (minimum). Each layer is separated by a 15P pad, another 15P pad is placed on top and the box is tape sealed. Pallets are stacked with 5 layers, each layer has 8 cases.*