


Product Group: Hooks
Sub Group: 246 Series
Item: Insert Hook

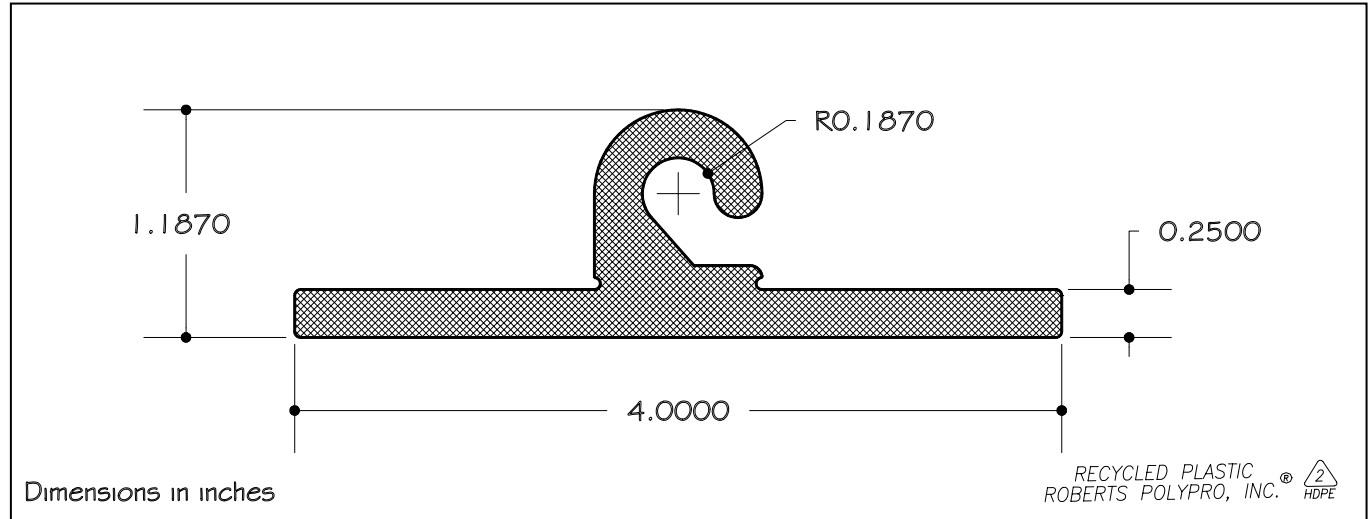

Current Product Numbers

246L.BLK Loose, Black Insert Hook
246C.3255 Welded, Green Insert Hook ¹
246C.393 Welded, Yellow Insert Hook ¹
246C.BLK Welded, Black Insert Hook ¹
246C.NAT Welded, Natural Insert Hook ¹
246C.WHT Welded, White Insert Hook ¹
Custom Ask us about customizing
a hook to meet your specifications

Quality Specifications

Material: High Density Polyethylene
Thickness: 0.059" ± 0.001"
Flatness Gauge: 1 Part Thickness
Surface Finish: Gloss
Part Weight: 1.39 grams
Cartridge Count: 250 ²
Cartridge Weight: 347.5 grams ²
Weld Strength: 4 lbs. ± 1 lb. ²
Weld Test Frequency: 1 Stick per Cavity - Every Six Cases ²

Packaging Information

Case Quantity:	<i>Loose:</i> 6,000	<i>Welded:</i> 6,900
Case Dimensions:	<i>Loose:</i> 15" × 12-1/4" × 9-1/4"	<i>Welded:</i> 15" × 12-1/4" × 9-1/4"
Pads per Case:	<i>Loose:</i> 2	<i>Welded:</i> 7
Pad Dimensions:	<i>Loose:</i> 14-7/8" × 12-1/8"	<i>Welded:</i> 14-7/8" × 12-1/8"
Case Weight:	<i>Loose:</i> 19.74 lbs.	<i>Welded:</i> 23.24 lbs.
Pallet Weight:	<i>Loose:</i> 632 lbs.	<i>Welded:</i> 737 lbs.
Cases per Pallet:	<i>Loose:</i> 40	<i>Welded:</i> 40

Packaging Notes: *Loose* - A 15P pad is placed on the bottom of a 15C case, followed by the parts. Then a 15P pad is placed on top and the box is tape sealed. *Welded* - A 15P pad is placed on the bottom of a 15C case, followed by 5 layers of 5 welded sticks containing 250 parts (minimum) and 1 layer of 3 welded sticks. Each layer is separated by a 15P pad, another 15P pad is placed on top and the box is tape sealed.

¹ The procedure used in welding these products is an exclusive, patented Roberts PolyPro process.

² Applies only to welded hooks.