


Product Group: Hooks  
Sub Group: 268 Series  
Item: Insert Hook

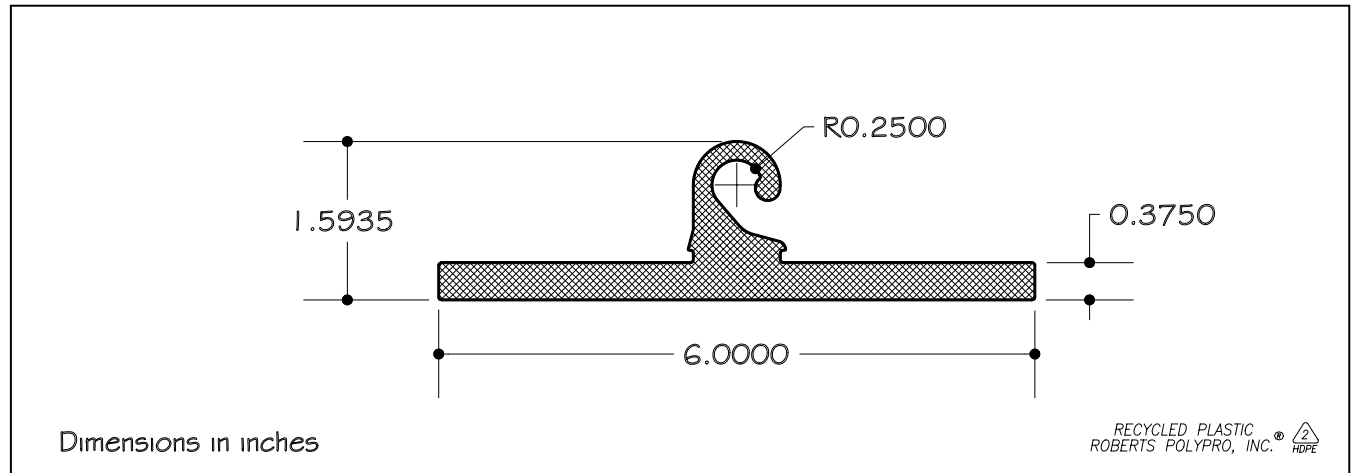

## Current Product Numbers

**268L.BLK** Loose, Black Insert Hook  
**268C.289** Welded, Blue Insert Hook <sup>1</sup>  
**268C.WHT** Welded, White Insert Hook <sup>1</sup>  
**Custom** Ask us about customizing a hook to meet your specifications

## Quality Specifications

**Material:** High Density Polyethylene  
**Thickness:** 0.079" ± 0.001"  
**Flatness Gauge:** 1 Part Thickness  
**Surface Finish:** Gloss  
**Part Weight:** 3.69 grams  
**Cartridge Count:** 142 <sup>2</sup>  
**Cartridge Weight:** 524.0 grams <sup>2</sup>  
**Weld Strength:** 4 lbs. ± 1 lb. <sup>2</sup>  
**Weld Test Frequency:** 1 Stick per Cavity - Every Six Cases <sup>2</sup>

## Packaging Information

<b>Case Quantity:</b>	<i>Loose:</i> 2,000	<i>Welded:</i> 2,100
<b>Case Dimensions:</b>	<i>Loose:</i> 15" × 12-1/4" × 9-1/4"	<i>Welded:</i> 15" × 12-1/4" × 9-1/4"
<b>Pads per Case:</b>	<i>Loose:</i> 2	<i>Welded:</i> 5
<b>Pad Dimensions:</b>	<i>Loose:</i> 14-7/8" × 12-1/8"	<i>Welded:</i> 14-7/8" × 12-1/8"
<b>Case Weight:</b>	<i>Loose:</i> 17.62 lbs.	<i>Welded:</i> 19.03 lbs.
<b>Pallet Weight:</b>	<i>Loose:</i> 570 lbs.	<i>Welded:</i> 610 lbs.
<b>Cases per Pallet:</b>	<i>Loose:</i> 40	<i>Welded:</i> 40
<b>Packaging Notes:</b>	<i>Loose</i> - A 15P pad is placed on the bottom of a 15C case, followed by the parts. Then a 15P pad is placed on top and the box is tape sealed. <i>Welded</i> - A 15P pad is placed on the bottom of a 15C case, followed by 4 layers of 3 welded sticks containing 175 parts (minimum). Each layer is separated by a 15P pad, another 15P pad is placed on top and the box is tape sealed.	

<sup>1</sup> The procedure used in welding these products is an exclusive, patented Roberts PolyPro process.

<sup>2</sup> Applies only to welded hooks.