


Product Group: Hooks  
Sub Group: 2759 Series  
Item: Insert Hook

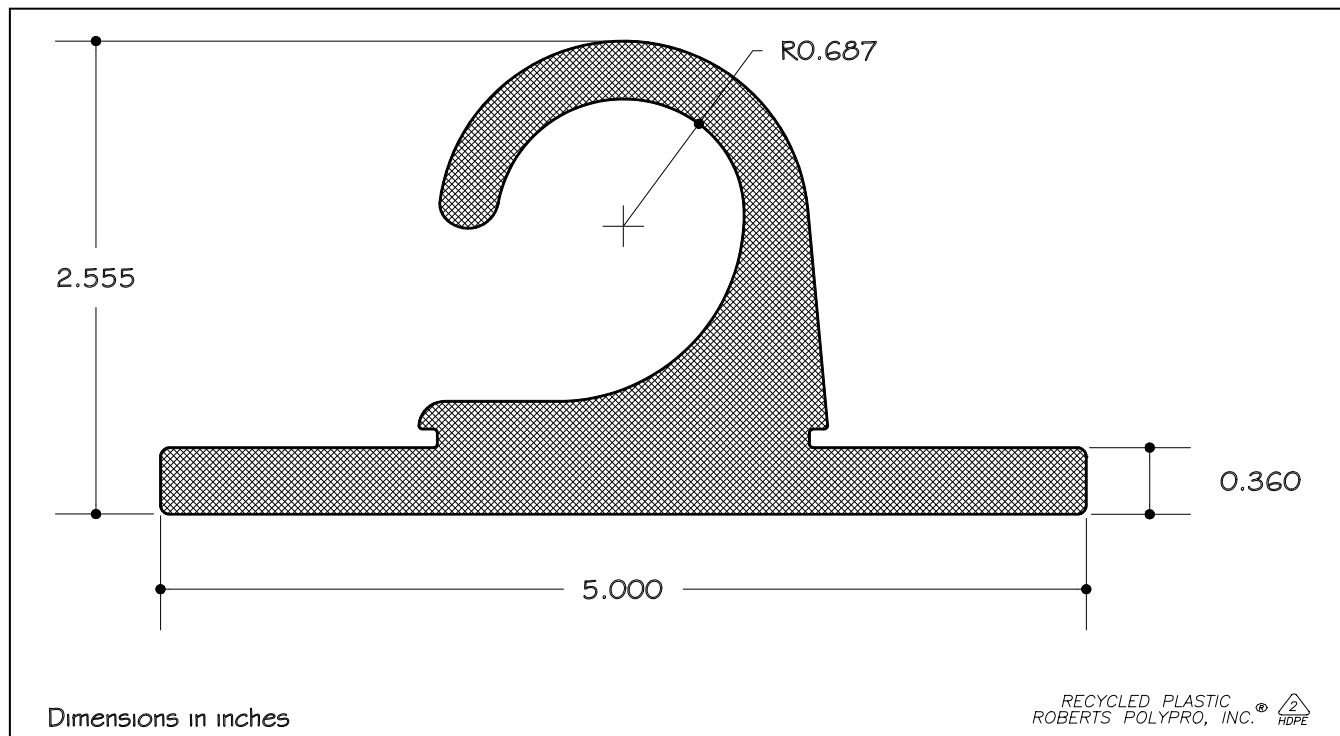

## Current Product Numbers

**2759C.BLK** Welded, Black Insert Hook <sup>1</sup>  
**2759C.NAT** Welded, Natural Insert Hook <sup>1</sup>  
**2759C.WHT** Welded, White Insert Hook <sup>1</sup>  
**2759L.WHT** Loose, White Insert Hook  
**Custom** Ask us about customizing  
a hook to meet your specifications

## Quality Specifications

**Material:** High Density Polyethylene  
**Thickness:** 0.089" ± 0.001"  
**Flatness Gauge:** 1 Part Thickness  
**Surface Finish:** Gloss  
**Part Weight:** 5.31 grams  
**Cartridge Count:** 137 <sup>2</sup>  
**Cartridge Weight:** 727.47 grams <sup>2</sup>  
**Weld Strength:** 4 lbs. ± 1 lb. <sup>2</sup>  
**Weld Test Frequency:** 1 Stick per Cavity - Every Six Cases <sup>2</sup>

## Packaging Information

|                          |  |                                       |
|--------------------------|--|---------------------------------------|
| <b>Case Quantity:</b>    | <i>Loose:</i> 2,000  | <i>Welded:</i> 2,050                  |
| <b>Case Dimensions:</b>  | <i>Loose:</i> 19-1/2" × 12-1/8" × 10-1/8"  | <i>Welded:</i> 15" × 12-1/4" × 9-1/4" |
| <b>Pads per Case:</b>    | <i>Loose:</i> 2  | <i>Welded:</i> 4                      |
| <b>Pad Dimensions:</b>   | <i>Loose:</i> 19-3/16" × 11-15/16"   | <i>Welded:</i> 14-7/8" × 12-1/8"      |
| <b>Case Weight:</b>      | <i>Loose:</i> 25.06 lbs.   | <i>Welded:</i> 26.07 lbs.             |
| <b>Pallet Weight:</b>    | <i>Loose:</i> 792 lbs.   | <i>Welded:</i> 822 lbs.               |
| <b>Cases per Pallet:</b> | <i>Loose:</i> 30   | <i>Welded:</i> 30                     |
| <b>Packaging Notes:</b>  | <i>Loose</i> - A 19P pad is placed on the bottom of a 19C case, followed by the parts. Then a 19P pad is placed on top and the box is tape sealed. <i>Welded</i> - A 19P pad is placed on the bottom of a 19C case, followed by 3 layers of 5 welded sticks containing 137 parts (minimum). Each layer is separated by a 19P pad, another 19P pad is placed on top and the box is tape sealed. |                                       |

<sup>1</sup> The procedure used in welding these products is an exclusive, patented Roberts PolyPro process.

<sup>2</sup> Applies only to welded hooks.